

Item# _____
Project: _____
Qty: _____

Sliding Glass Door Reach-In Refrigerator

GR-48S



Features

- Electronic Thermostat & Digital LED Temperature Display
- High Efficiency CFC Free Insulation
- 4 Epoxy Coated Shelves Per Door
- Low-e Double Pane Glass Doors with Heater on Glass & Inside Door Frame
- Interior: Powder-Coated Steel White
- Exterior: Powder-Coated Steel White, Plastic Top Sign Panel with Lamp
- LED Internal Lamp
- Shipped with Casters Installed
- Top Illuminated Panel

You will appreciate the attractive professional aesthetics of this unit which will add curb appeal to any type of business.

Conforms to UL471, CSA C22.2 and NSF 7 Standards.

Two Year - Parts & Labor on entire unit. Valid in United States
Three Year - Additional Compressor, Part Only



Serv-Ware

www.servware.com

SERV-WARE

Phone:(800) 768.5953

Revised 4/19


Fax:(800) 976.1299

Item# _____

Project: _____

Qty: _____

Sliding Glass Door Reach-In Refrigerator

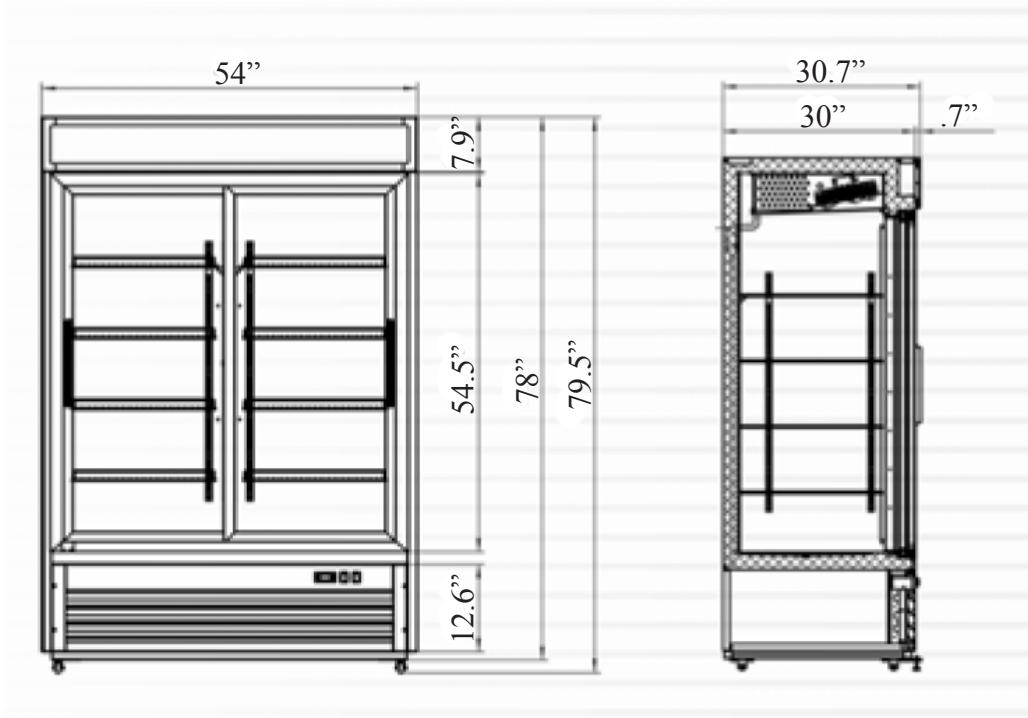

Dimensions

Exterior Dimensions

53.9" W x 30.7" D x 79.5" H

Net Volume

48 cu. ft.

Shipping Weight

514 lbs

Cooling

Temperature Range 33°F – 41°F

R134A

Refrigerant

Every 6 Hours

Defrosting

$\frac{1}{2}$

H/P

Construction

Exterior Material

Powder Coated White Steel

Interior Material

Powder Coated White Steel

Insulation Material

CFC Free Foam

Shelf Material

4 Epoxy Coated Wire

Electrical

Voltage 115

Amps 7

Hz 60

Phase 1



Serv-Ware
www.servware.com

Phone:(800).768.5953

Revised 4/19

Fax:(800).976.1299

