

Item# \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_

# Glass Door Reach-In Refrigerator

## GR-12

12 cu. ft. Refrigerator

## GR-23

Single Door Refrigerator

## GR-35

Double Door Refrigerator

## GR-48

Double Door Refrigerator

## GR-16

16 cu. ft. Refrigerator



## Features

- Electronic Thermostat and Digital LED Temperature Display
- High Efficiency CFC Free Insulation
- Self-Closing Doors
- Double Pane Glass Doors Remain Open Past 90°
- Low-e Double Pane Glass Doors
- Epoxy Coated Shelves
- INTERIOR: White Powder-Coated Steel
- EXTERIOR: White Powder-Coated Steel
- LED Internal Lamp
- Top Illuminated Top Panel
- UL Safety and UL Sanitation Approved

You will appreciate the attractive professional aesthetics of these units which will add curb appeal to any type of business. Our units are featured with white powder coated steel interior and exterior, double pane glass, self-closing lockable doors, digital controls with a LED readout and foamed in place polyurethane cell insulation. Model GR-35 is featured with low-e triple pane glass doors. Unit is shipped with wheels installed.

The bottom mounted compressor designed to hold temperatures between 33° F and 41° F.

**Conforms to UL471, CSA C22.2 and NSF 7 Standards.**

**Two Year** - Parts & Labor on entire unit. Valid in United States  
**Three Year** - Additional Compressor, Part Only



**Serv-Ware**  
[www.servware.com](http://www.servware.com)

Phone: (800).768.5953

Revised 4/19


Fax: (800).976.1299



Serv-Ware

# Glass Door Reach-In Refrigerator

## GR-12 (A) & GR-16 (B) Single Door

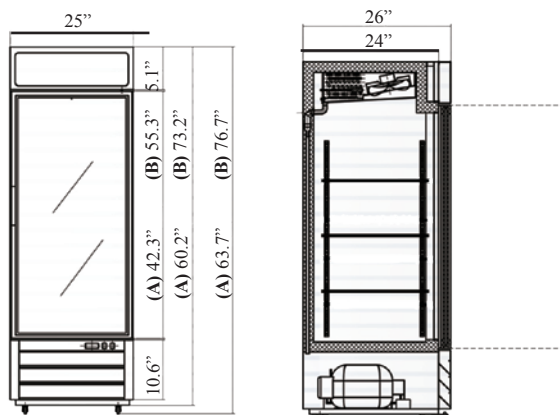

### Dimensions

|                     |                         |                           |
|---------------------|-------------------------|---------------------------|
|                     | (A) GR-12               | (B) GR-16                 |
| Exterior Dimensions | 25" W x 26" D x 63.7" H | 25" x W x 26" D x 76.7" H |
| Net Volume          | 12 cu. ft.              | 16 cu. ft.                |
| Shipping Weight     | 250 lbs.                | 283 lbs.                  |

### Construction

|                     |                           |
|---------------------|---------------------------|
| Exterior Material   | Powder Coated White Steel |
| Interior Material   | Powder Coated White Steel |
| Insulation Material | CFC Free Foam             |
| Shelf Material      | 3 Epoxy Coated Wire       |

### Cooling

|                   |               |
|-------------------|---------------|
| Temperature Range | 33°F – 41°F   |
| Refrigerant       | R134A         |
| Defrosting        | Every 6 Hours |
| H/P               | 3/8           |

### Electrical

|         |     |
|---------|-----|
| Voltage | 115 |
| Amps    | 6   |
| Hz      | 60  |
| Phase   | 1   |

### Dimensions

|                     |                         |
|---------------------|-------------------------|
| Exterior Dimensions | 27" W x 32" D x 81.5" H |
| Net Volume          | 23 cu. ft.              |
| Shipping Weight     | 353 lbs                 |

### Construction

|                     |                           |
|---------------------|---------------------------|
| Exterior Material   | Powder Coated White Steel |
| Interior Material   | Powder Coated White Steel |
| Insulation Material | CFC Free Foam             |
| Shelf Material      | 4 Epoxy Coated Wire       |


### Cooling

|                   |               |
|-------------------|---------------|
| Temperature Range | 33° – 41°F    |
| Refrigerant       | R134A         |
| Defrosting        | Every 6 Hours |
| H/P               | 3/8           |

### Electrical

|         |     |
|---------|-----|
| Voltage | 115 |
| Amps    | 6   |
| Hz      | 60  |
| Phase   | 1   |

## GR-23 Single Door

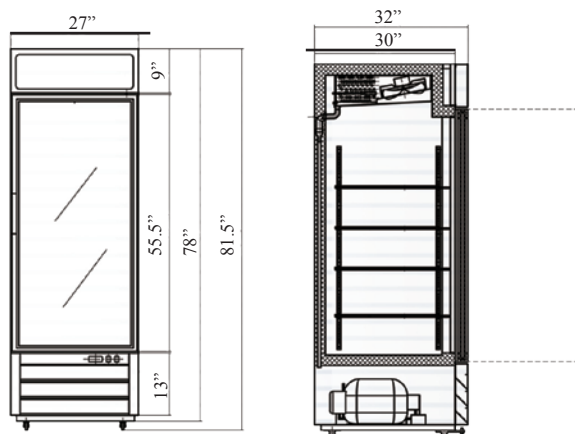

## GR-35 (A) & GR-48 (B) Double Door

### Dimensions

|                     |                           |                           |
|---------------------|---------------------------|---------------------------|
|                     | (A) GR-35                 | (B) GR-48                 |
| Exterior Dimensions | 39.5" W x 32" D x 79.5" H | 54" x W x 32" D x 81.5" H |
| Net Volume          | 35 cu. ft.                | 49 cu. ft.                |
| Shipping Weight     | 461 lbs.                  | 547 lbs.                  |

### Construction


|                     |                                  |
|---------------------|----------------------------------|
| Exterior Material   | Powder Coated White Steel        |
| Interior Material   | Powder Coated White Steel        |
| Insulation Material | CFC Free Foam                    |
| Shelf Material      | 8 Epoxy Coated Wire (4 Per Door) |

### Cooling

|                   |               |
|-------------------|---------------|
| Temperature Range | 33° – 41°F    |
| Refrigerant       | R134A         |
| Defrosting        | Every 6 Hours |
| H/P               | 1/2           |

### Electrical

|         |     |
|---------|-----|
| Voltage | 115 |
| Amps    | 7   |
| Hz      | 60  |
| Phase   | 1   |

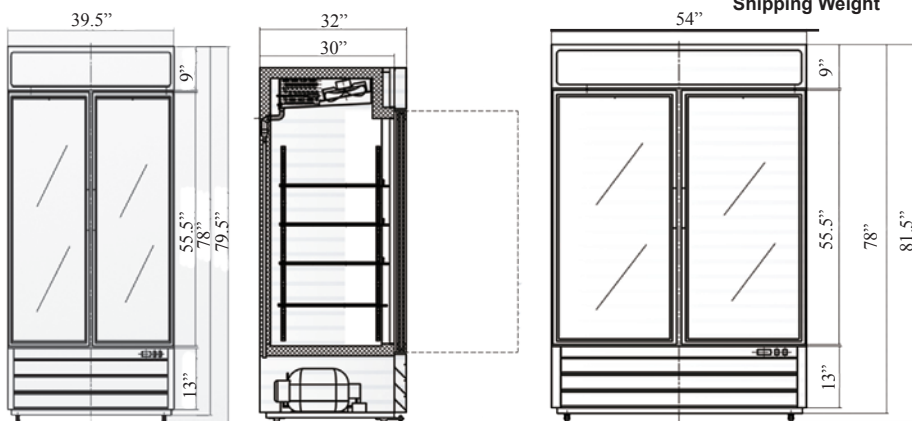

Serv-Ware  
www.servware.com

Phone: (800).768.5953

Revised 4/19

Fax: (800).976.1299

